

General

This page describes how to integrate and control the OSRAM Lightify LED-System via IQONTROL App. Generally any Lightify device can be controlled only via OSRAM Lightify central control unit.

Precondition

To integrate Lightify devices to IQONTROL, you first have to configure the OSRAM Lightify central control unit and the Lightify devices with the original OSRAM App. If the configuration is already done and you can control your Lightify devices with the original OSRAM App, you can integrate them to IQONTROL.


Integrate OSRAM Lightify central control unit as a gateway

Please connect the OSRAM Lightify central control unit to a power source and make it is in the same network as your mobile device/ the IQONTROL App.


To do this you have to go to "Setup" and then to the tab "Setup". There you have to tap on "Add gateway...". On the next page you have to tap on "Add manually". On the following page you have to change the gateway type to "OSRAM Lightify", set a name and enter the IP-address of the gateway. Finally tap on "Add".

Integrate Lightify devices

In the next step you can add Lightify bulbs, lamps etc as a new device. To do this go to “Setup” and then to the tab “Rooms”. Now you have to select the room to which this device should be added. Alternatively you have to add a new room. After that you have to tap on “Add new device...” and select your OSRAM Lightify central control unit as the gateway. Now you get a list of all Lightify groups and devices which are programmed in the central unit.

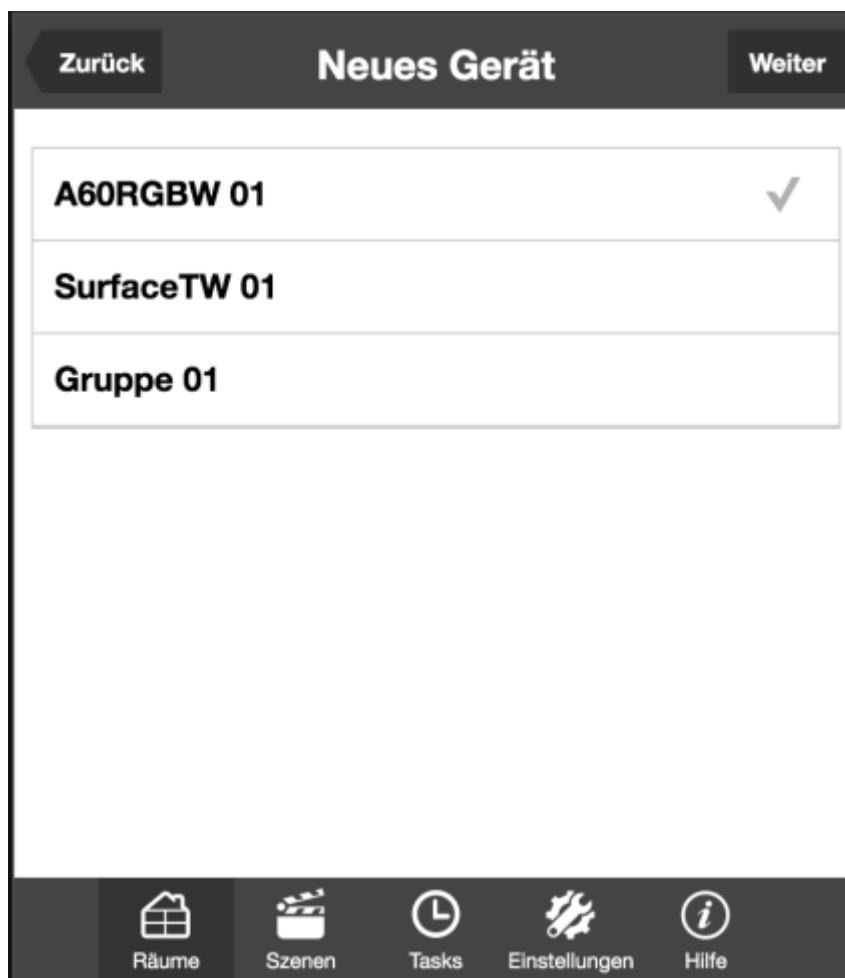

Now select a device or a group and tap on “Next”. Assign a name for the selected device/ group and finally tap on “ Add” to add this new device/ group. A tile for the new device/ group will be added in the selected room to control the device/ group.

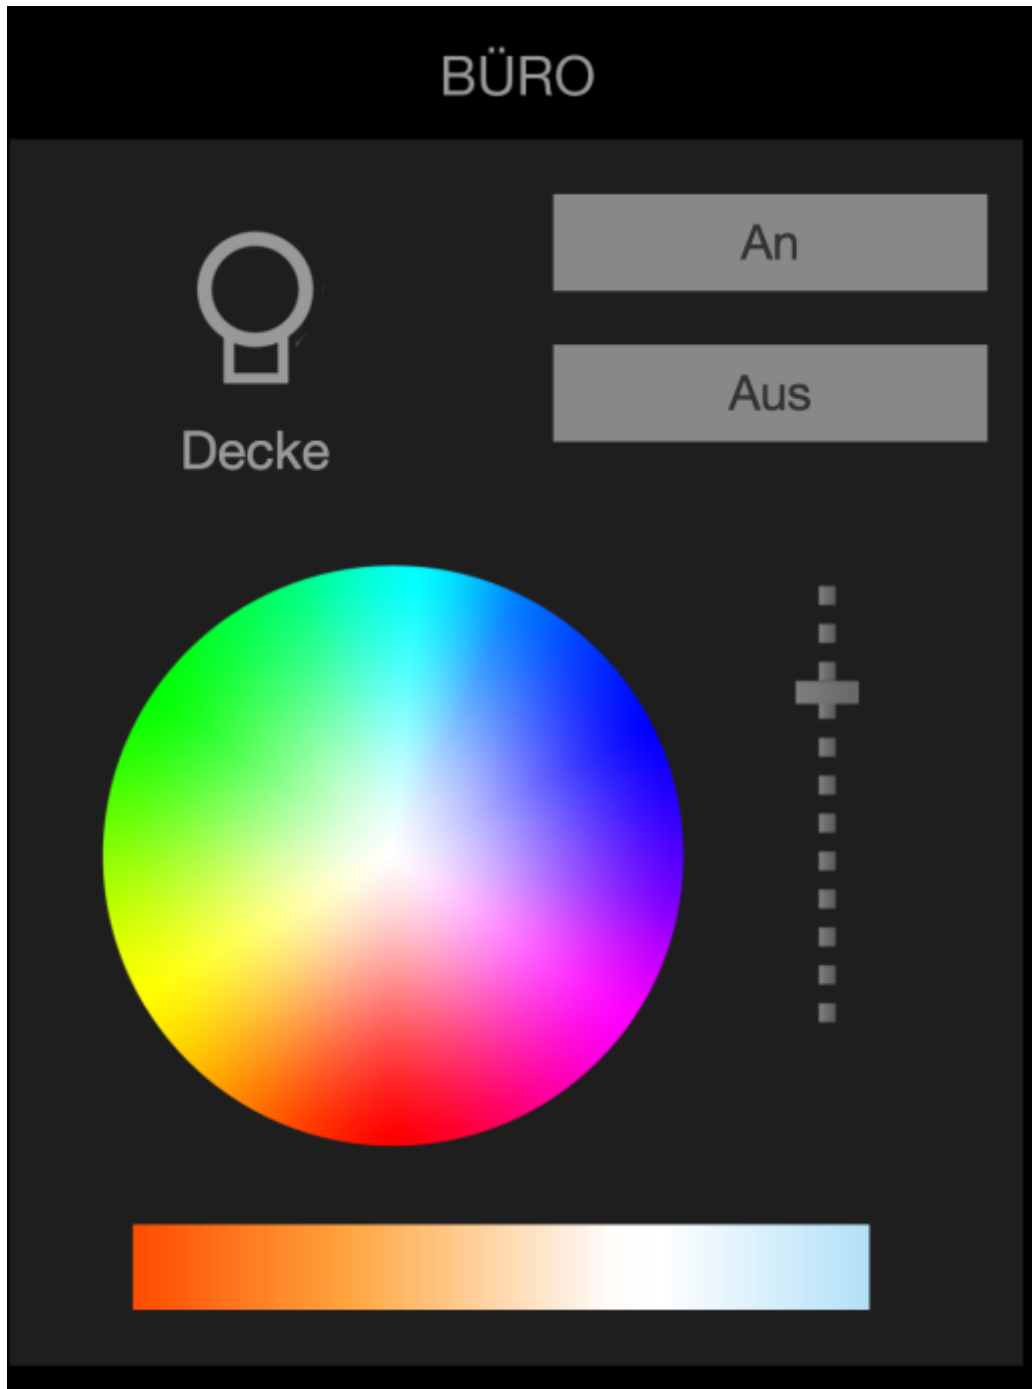

The image shows an example for a possible Lightify-tile. The functions of a Lightify-tile always depends on the functionality of the assigned device/ group.

From:

<https://doku.mediola.com/> - **Dokumentationen**

Permanent link:

<https://doku.mediola.com/doku.php?id=en:iqontrol:osram-lightify>

Last update: **2016/07/01 09:56**

